



# HIOKI

## CLAMP ON POWER LOGGER PW3360-20, PW3360-21

Power Measuring Instruments



# Handy and Easy to Use – Power Management Support



Now with  
**QUICK SET**  
Convenience

**NEW**

Harmonic Measurement Model  
**PW3360-21**

**Reliable measurements start with proper wiring.**

**The QUICK SET function** guides you in making the right connections.



Connect the voltage leads and clamp sensors using the color guides.

**Function Enhancement** Included from version 2.00

- See demand and trend graphs on site
- Supports single to three-phase, 4-wire circuits
  - Simultaneously measure up to three single-phase, 2-wire circuits (in the same power system).
- Measure up to 780V with a 1000V display range
- Broadly applicable for many jobs, including leakage current measurement
  - An optional clamp-on leakage sensor supports measurements as low as 50 mA.
- Store months of data on SD cards


  
 ISO 9001 JMI-0216  
 ISO14001 JQA-E-90091


[www.hioki.com](http://www.hioki.com)  
HIOKI company overview, new products, environmental considerations and other information are available on our website.

# Begin with QUICK SET Convenience

Select your Wiring Type, Clamp and Destination, and Connect

Select wiring type (example: 3P4W) and connect

**1** Connect the leads to the PW3360-20.

Connect the voltage leads and clamp sensors using the color guides.

Make proper connections simply by observing the colors of the displayed leads.

**2** Connect the voltage clips.

Connect the voltage leads. ENTER to view the SUMMARY.

PASS

Double checks your voltage input and phase

**3** Connect the clamp sensors.

Connect the clamp sensors. Press F2 to select the current range.

Check wire connection status and judgment indicators.

FAIL

If FAIL appears, move the cursor to the indicator and press the [ENTER] key.

Corrective action tips appear


Phase Check Summary

- CHECK will display when each current phase is within  $\pm 60$  to  $\pm 90$  degrees with respect to the voltage of each phase.
- Are the voltage leads and clamp-on sensors properly connected?
- Does the arrow of the clamp-on sensor point to the load side?

NEXT:  $\nabla$ key, Hit ESC to close.

## Miswiring Example (Clamp Orientation)

Correct Orientation

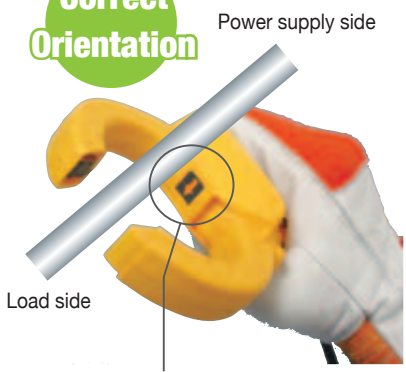

### Wiring Screen Display Examples

**FAIL** The I vector's phase direction is opposite the determination area.

U1	221 V	VOLT INPUT
U2	223 V	CURR INPUT
U3	222 V	VOLT PHASE
I1	34.7 A	CURR PHASE
I2	33.3 A	PHASE DIF1
I3	35.3 A	PHASE DIF2
P	6.5kW	PHASE DIF3
DPF	LG 0.90	PF(DPF)

**PASS** The I vector's phase direction is within the determination area.

U1	221 V	VOLT INPUT
U2	223 V	CURR INPUT
U3	222 V	VOLT PHASE
I1	34.7 A	CURR PHASE
I2	33.3 A	PHASE DIF1
I3	35.3 A	PHASE DIF2
P	20.6kW	PHASE DIF3
DPF	LG 0.90	PF(DPF)

Affected measurement values:

Examples: P (Power) displayed value is too low **P: 6.5kW**

Changed I3 Clamp

**P: 20.6kW**


# Reveal Power Consumption State! Graph Display Functions

**Function Enhancement** Included from version 2.00

## Demand Graph Display

Shows the demand value transitions useful for managing power consumption. Check maximum demand values and times while recording.

Read values at cursor

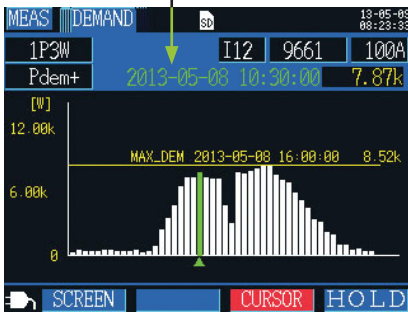


**Maximum Demand Values**


Automatically refreshes with latest values

One-day graph showing 48 thirty-minute intervals

## Evaluate Photovoltaic Generation Capabilities

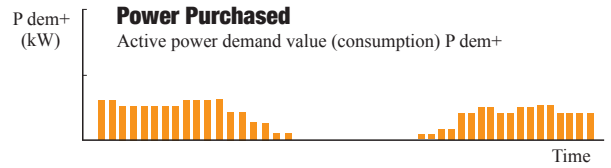

Switched Display

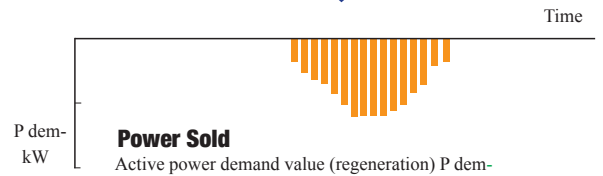


## Trend Graph Display

From all measurement items, select one for display. Check states such as power fluctuations of devices in on-site operating conditions.

\* Except for demand and harmonics

Read values at cursor

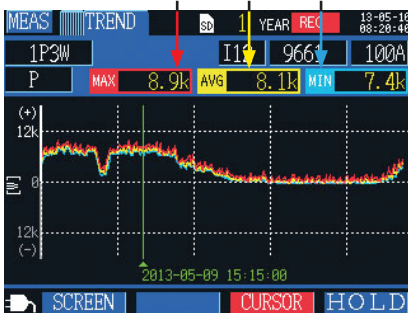

Of the interval time  
**Maximum Value**  
**Average Value**  
**Minimum Value**  
 Graph Display


Automatically refreshes with latest values

Graph showing intervals of up to 200 points

## Capture and record all fluctuations

To conveniently record fluctuations even over long periods, select "All" saving items to record maximum, minimum and average values within each recording interval.

Continuous calculation at 200 ms intervals without gaps


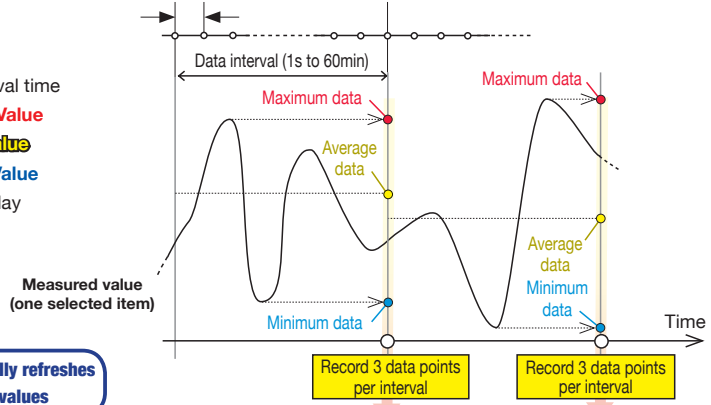


# Create a Graph to Clearly Grasp Power Consumption



Record power consumption on an SD Card\* at specific intervals. Load the data into the PC.

Use Excel graph processing for before and after comparisons.

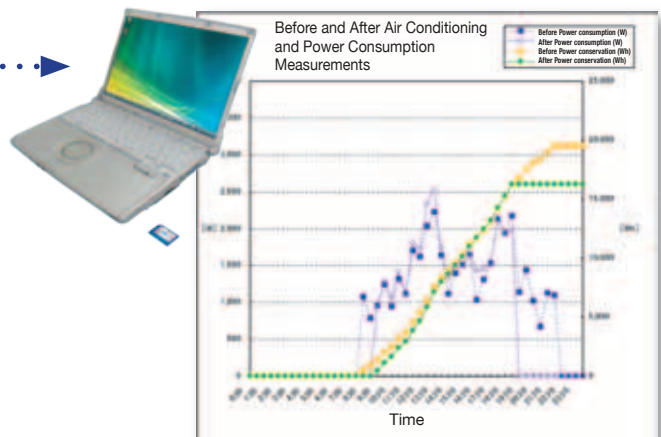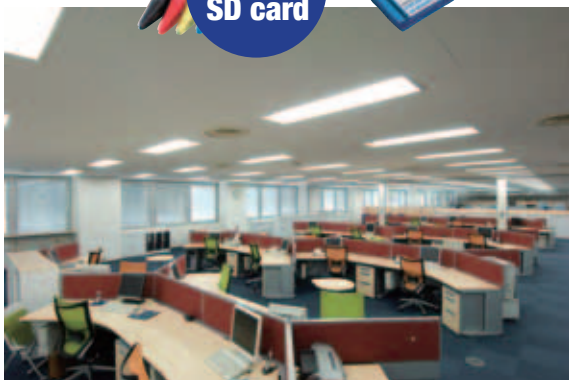

\* Store up to one year's data acquired at one minute intervals. Performance cannot be guaranteed on storage media other than Hioki-specified SD card options.

# Accommodates All Worksites

## Tight spaces



**Compact**

**In dim environments  
Easy-to-see color LCD**



## Where no AC power is available

**Battery\*** power provides about eight hours of continuous operation. In addition, a **Voltage Line Power Adapter\*** is available to power the PW3360-20 from the measurement lines.


\* Battery Set PW9002 and Voltage Line Power Adapter PW9003 options are sold separately.



**Voltage Line  
Power Adapter**



**Battery Set PW9002**

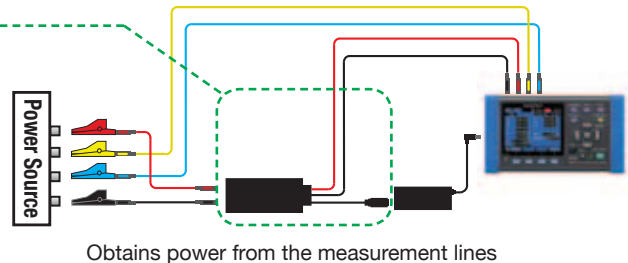

## In severe temperature environments

The operating temperature range extends from **-10°C (14°F) to 50°C (122°F)**.


Even under battery operation, measurements can be performed from 0 °C (32°F) to 40°C (104°F) (0°C (32°F) to 50°C (122 °F) when using LAN communication).

## Magnetic voltage adapters for hard-to-clip terminals

Magnetic voltage adapters convertible with the Voltage Cords L9438-53 let you accurately detect voltage when the circuit terminals are too shallow for alligator clips to latch on.

\* Magnetic Adapter 9804 option sold separately.

**9804-01 Magnetic Adapter (red) usage example**

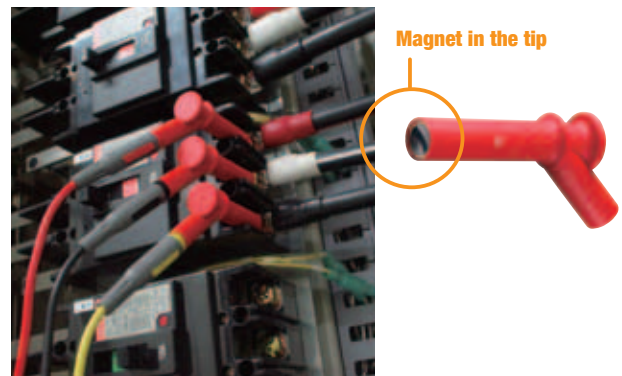


Generally compatible with M6 pan screws



# Loaded with More Useful Functions


## Simultaneous Measurements

Simultaneously measures three single-phase 2-wire circuits in the same system.

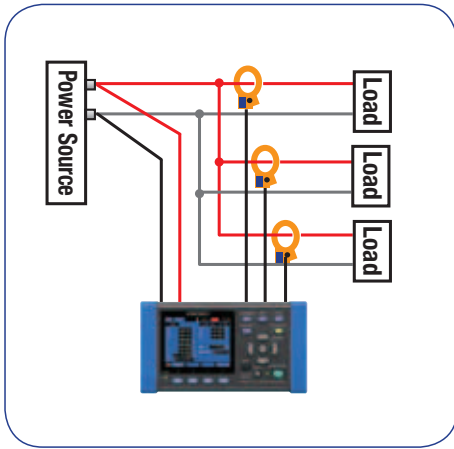


## Pulse Input

The pulse input function can be used to record power data and production volume counts simultaneously. The power data and pulse volume (production volume) information are **useful for unit cost production management**.

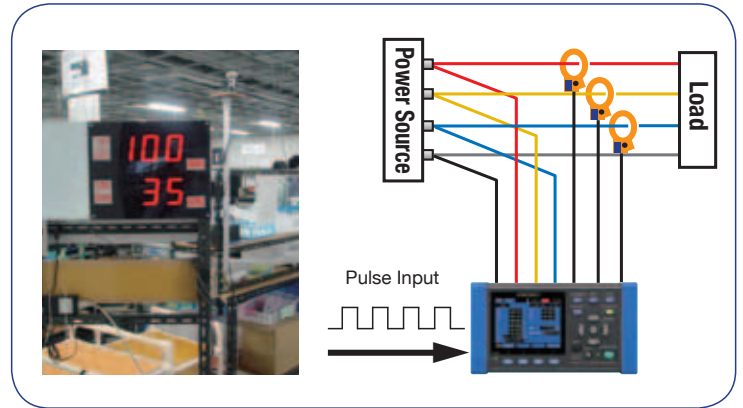


## Pulse Output

Use the Pulse Output function to acquire temperature and pulse (electrical) data simultaneously with a data logger. Evaluate the relationship between air conditioner temperature control settings and power consumption.

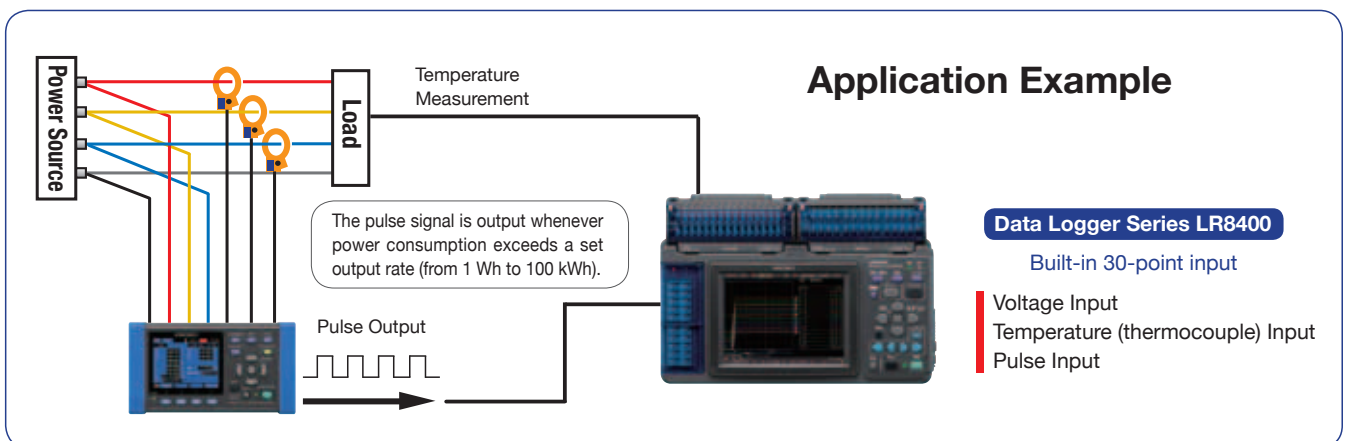

## Leakage Current Measurement

With the optional leakage current clamp on sensors, turn the instrument into a 3-channel leakage current logger to help identify trouble spots.

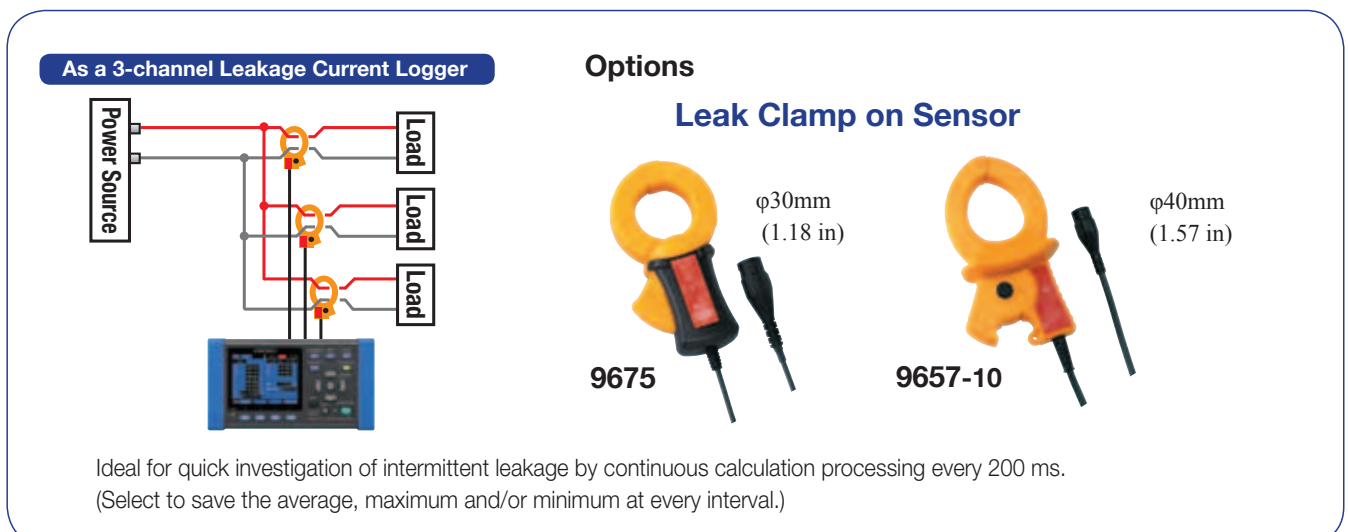

# Harmonic Measurement Model

## PW3360-21

**NEW**

Analyze voltage and current harmonics on a 50/60 Hz power line from the fundamental waveform to the 40th order.



Maximum, average, and minimum values can be saved in binary format to SD card at each interval.

- Displays the RMS value, content, and phase angle (numerical list or graph display) for each harmonic order.
- Vector display of power phase angle

Harmonic Graph Screen



(vector display)

Harmonic power phase angle graph screen




Power Logger Viewer SF1001 is required to display the data on a PC.



SF1001 Display Example

Harmonic Time Series Display


Select and display a time series graph of fundamental, third- and fifth-order current harmonics.

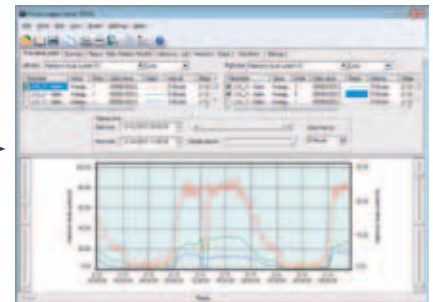


**Remote Monitor**

## HTTP Server Function


Use a LAN cable to connect the PW3360-20 or PW3360-21 to a personal computer for real-time remote monitoring and measurement display in a web browser.

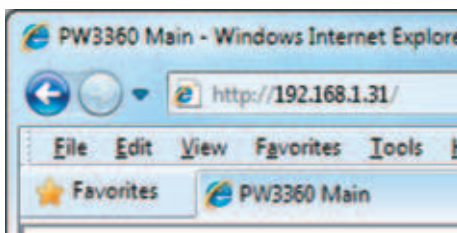

Enter the IP address in the browser.

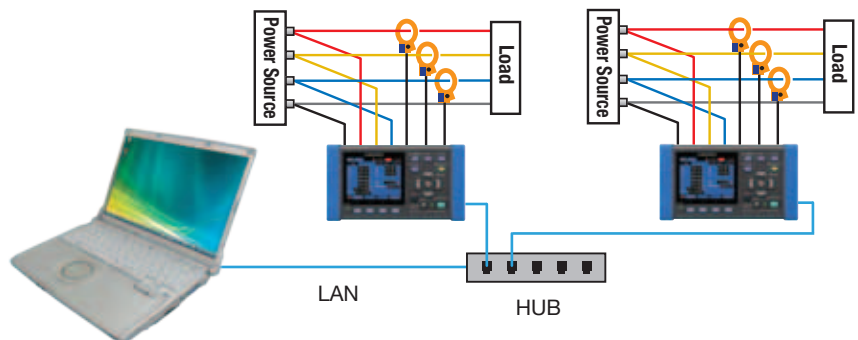

Files recorded in the Clamp On Power Logger's internal memory or SD card are accessible via a LAN or USB connection, and are downloadable using the free **PW3360 Setup and Download Software**.

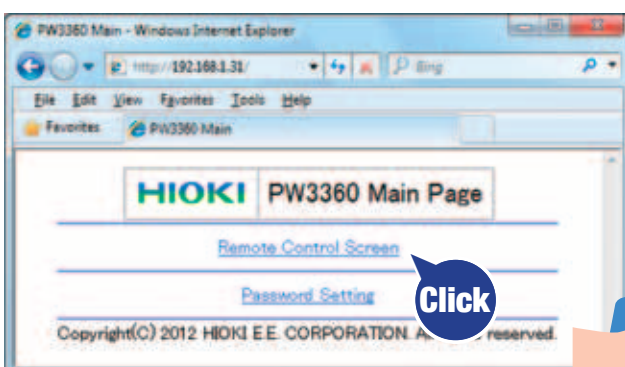


Click the on-screen keys to operate remotely.

# Efficient Power Analysis on the PC

**Freeware for Model PW3360-20, PW3360-21** (free download from the Hioki website)

## PW3360 Setup and Download Software

Use with a LAN or USB connection to download data recorded in the PW3360's internal memory or SD Card to a PC, and to change instrument settings from the PC.

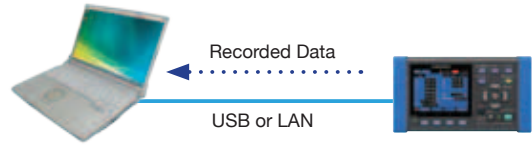


## PW3360 Excel Graph Auto-Creation Software

Install the PW3360 Excel Graph Auto-Creation Software to create graphs in Excel automatically using recorded measurement data.



## Simple Operation and Easy Graph Creation

Indication example

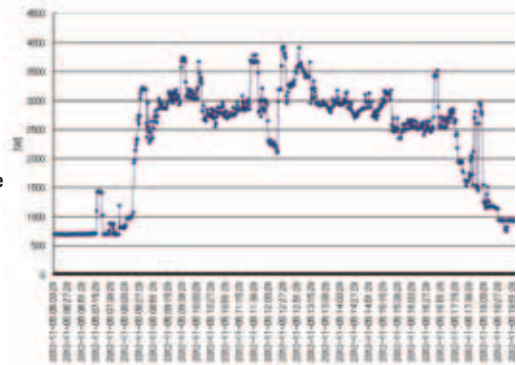

## PC Processing


### Power Logger Viewer SF1001 (option, sold separately)

Data saved to an SD card or internal memory can be loaded into a PC for expanded display, aggregation and analysis.

On the same time axis, view measured power consumption and equipment operating status at specific intervals, along with equipment characteristics and management details.

- Trend graph display function
- Summary display function
- Waveform display
- Harmonic display
- Copy function
- Print function
- Report printing

### Simultaneously measure and record separate loads using three PW3360-20s

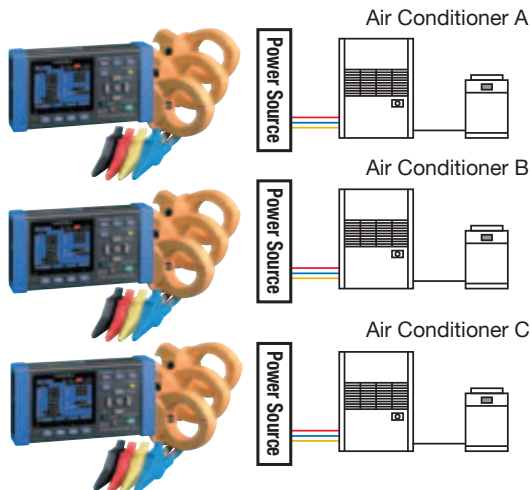

## Stacked Graph Display Example

Use the [Stacked Display] to confirm at a glance comparative power consumption at multiple locations simultaneously.




## PW3360-20, PW3360-21 Specifications

(product guaranteed for one year)


Input specifications	
Measurement line type	Single-phase 2-wire, single-phase 3-wire, three-phase 3-wire, three-phase 4-wire
Measurement line Frequency	50/ 60 Hz
Number of input channels	Voltage: 3 channels U1 to U3 Current: 3 channels I1 to I3
Voltage range	600 V AC Total display area: 5V to 1000 V (less than 5 V displays as 0 V) <b>When RMS voltage is zero, zero is displayed for all orders of harmonic voltage.</b> Effective measurement range: 90 V to 780 V, peak: $\pm 1400V$ [OVER] indicates over-range warning
Current ranges	<b>Load current</b> CLAMP ON SENSOR 9694 : 500m/1/5/10/50 A CLAMP ON SENSOR 9695-02 : 500m/1/5/10/50 A CLAMP ON SENSOR 9660 : 5/10/50/100 A CLAMP ON SENSOR 9695-03 : 5/10/50/100 A CLAMP ON SENSOR 9661 : 5/10/50/100/500 A CLAMP ON SENSOR 9669 : 100/200/1k A FLEXIBLE CLAMP ON SENSOR CT9667 : 500/5k A <b>Leakage current</b> LEAK CLAMP ON SENSOR 9657-10 : 50m/100m/500m/1/5 A LEAK CLAMP ON SENSOR 9675 : 50m/100m/500m/1/5 A Total display range: Within 0.4 to 130% of the range (zero is suppressed for less than 0.4%) <b>When RMS current is zero, zero is displayed for all orders of harmonic current.</b> Effective measurement range: Within 5 to 110% of the range peak: $\pm 400\%$ of range, however, maximum range is 200%. [OVER] indicates over-range warning
Power ranges	300.00 W to 9.0000 MW Depends on voltage/current combination and measured line type (see Measurement Range Configuration Tables) Total display range: Within 0 to 130% of the range ("0W" display indicates zero rms voltage and/or current) <b>When RMS voltage and current are zero, zero is displayed for all orders of harmonic active power and harmonic reactive power.</b> Effective measurement area: Within 5 to 110% of the range
VT ratio settings	Any (0.01 to 9999.99) Selections (1/60/100/200/300/600/700/1000/2000/2500/5000)
CT ratio settings	Any (0.01 to 9999.99) Selections (1/40/60/80/120/160/200/240/300/400/600/800/1200)
Input methods	Voltage: Insolated inputs (except between U1, U2, U3 and N) Current: Isolated input using a clamp-on sensor
Input resistance	Voltage input part: 3 M $\Omega$ $\pm 20\%$ (50/ 60 Hz)
Maximum rated voltage between terminals	Voltage input section: 1000 VAC, 1400 Vpeak Current input section: 1.7 VAC, 2.4 Vpeak
Maximum rated voltage to earth	Voltage input section: 600V Measurement Category III 300V Measurement Category IV Current input section: Depends on clamp sensor in use.

Pulse input	
Input specifications	No-voltage contact input (counts when shorted terminals open) Voltage input (Hi: 2 V to 45 V, Lo: 0 V to 0.5 V, counts at Lo to Hi) Maximum rated input between terminals: 45 V DC Maximum rated input to ground: not isolated (GND is equipment common)
Measurement range	0 to 9999 (maximum pulse count per save interval)
Filter	Filter On (for mechanical contacts) 25 Hz or less, and at least 20 ms Hi and Lo pulse width Filter Off (for solid-state contacts) 5 kHz or less, and at least 100 $\mu s$ Hi and Lo pulse width
Scaling	Displays product of pulse count and scaling factor setting Setting ranges: 0.001 to 1.000, and 1.000 to 100.00

### Pulse input terminals



### Pulse output terminals

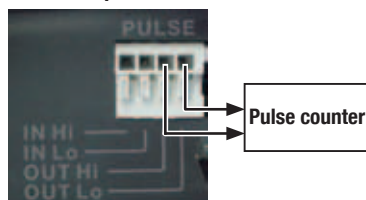

Specifications in green available from version 2.00

Specifications in orange available in Model PW3360-21 only

Measurement items	
Voltage	RMS value, fundamental wave value, waveform peak (absolute value), fundamental wave phase angle, frequency (1)
Current	RMS value, fundamental wave value, waveform peak (absolute value), fundamental wave phase angle
Power	Active power, reactive power (with lag/lead display), apparent power, power factor, (with lag/lead display) or displacement power factor (with lag/lead display), active energy (consumption, regeneration, regeneration), reactive energy (lag, lead) <b>Energy cost display (per-kWh price <math>\times</math> power consumption)</b>
Demand	Active power demand value (consumption, regeneration), reactive power demand value (lag, lead), active power demand quantity *(consumption, regeneration), reactive power demand quantity *(lag, lead), power factor demand value, pulse input * Only data output to SD card
Harmonic	Harmonic voltage, current, power level, content, phase angle Total harmonic distortion factor (THD-F or THD-R)

Measurement screen	
List	Voltage RMS value, current RMS value, frequency, total active power, total reactive power, apparent power, power factor or displacement power factor, active energy (consumption), elapsed time
U/I	Voltage RMS value, voltage fundamental wave value, voltage waveform peak, voltage fundamental wave phase angle, current RMS value, current fundamental wave value, current waveform peak, current fundamental wave phase angle
Power	Per-channel and total active power, apparent power, reactive power, power factor or displacement power factor
Integ	Active energy (consumption, regeneration), reactive energy (lag, lead), recording start time, recording stop time, elapsed time, <b>energy cost</b>
Demand	Active power demand value (consumption, regeneration), reactive power demand value (lag, lead), power factor demand value, or pulse input Displays the maximum active power demand value and the time at which it occurred (this information is not saved). (data from up to 48 intervals is internally stored, then refreshed oldest-first).
Harmonic	Graph (voltage, current and power levels, content percentage and phase angle) List (voltage, current and power levels, content percentage and phase angle)
Waveform	Displays voltage and current waveform, voltage and current RMS values, and frequency. With a 3P3W3M connection, displays the phase voltage waveform from the virtual neutral point.
Zoom	Enlarged view of 4 user-selected parameters
Trend	For one selected measurement item (except demand and harmonics), displays maximum, average and minimum values, with cursor calculations available (Note: with Trend display, there is no power-off backup function).

External interfaces Specifications	
SD card Interface	Settings data, measurement data, screen data, <b>waveform data (support planned from version 2.00)</b>
LAN interface	10BASE-T/100BASE-TX IEEE802.3 Compliance - HTTP server function - Download settings and data by communication application program
USB interface	USB Ver 2.0, Windows 8 (32/64bit)/Windows 7 (32/64bit) / Vista (32bit) / XP - When connected to a computer, the SD Card and internal memory are recognized as removable storage devices. - Download settings and data by communication application program

Pulse output	
Function	Output pulse rate is proportional to active power consumption (WP+) when measuring integral power consumption
Pulse rate	OFF/1Wh/10Wh/100Wh/1kWh/10kWh/100kWh/1000kWh (Default: 1 kWh)
Pulse width	approx. 100 ms
Output signal	Open-collector 30 V, 5 mA max (photocoupler isolated) Active Low

## WIRE SPECIFICATIONS

Electric wires that conform with:

- single line:  $\phi 0.65$  mm (AWG22)
- twisted wire: 0.32 mm<sup>2</sup> (AWG22)
- strand diameter:  $\phi 0.12$  mm or more

Supported electric wires:

- single line:  $\phi 0.32$  mm to  $\phi 0.65$  mm (AWG28 to AWG22)
- twisted wire: 0.08 mm<sup>2</sup> to 0.32 mm<sup>2</sup> (AWG28 to AWG22)
- strand diameter:  $\phi 0.12$  mm or more
- exposed wire length: 8 mm



Specifications in green available from version 2.00

Specifications in orange available in Model PW3360-21 only

General Specifications	
Display device	3.5 inch TFT color LCD (320 × 240 pixel) Japanese, English, <b>Chinese (Simplified, supported from version 2.00)</b> Backlight auto-off function (after 2 minutes) When AUTO OFF is active, the Power LED blinks
Operating environment	Indoors, Pollution degree 2, altitude up to 2000 m (6562-ft.)
Operating temperature and humidity (no condensation)	-10°C to 50°C (14°F to 122°F), 80% RH or less During LAN communication: 0°C to 50°C (32°F to 122°F), 80% RH or less During battery operation: 0°C to 40°C (32°F to 104°F), 80% RH or less During battery charging: 10°C to 40°C (50°F to 104°F), 80% RH or less
Storage temperature and humidity (no condensation)	-20°C to 60°C (-4°F to 140°F), 80% RH or less However, the battery's storage temperature range is -20°C to 30°C (-4°F to 86°F), 80% RH or less
Dielectric strength	4.29 kVRms AC (1 mA sense current) between voltage input terminals and external terminals, 50/ 60 Hz for 60 sec.
Applicable standards	Safety: EN61010, EMC: EN61326, EN61000-3-2, EN61000-3-3
Power supply	•Z1006 AC Adapter (12 V, 1.25 A), Rated supply voltage 100 VAC to 240 VAC, Rated power supply frequency 50/60 Hz •Model 9459 Battery Pack (Ni-MH DC7.2 V 2700 mAh)
Charge function	Charges the battery regardless of whether the instrument is on or off. Charge time: Max. 6 hr. 10 min. (reference value at 23°C)
Maximum rated power	•When the Z1006 AC Adapter is used: 40 VA (including AC adapter), 13 VA (PW3360-20 instrument only) •When the 9459 Battery Pack is used: 3 VA
Continuous battery operation time	Approx. 8 hr. (Continuous, backlight off) (when using the battery pack)
Backup battery life	Clock and settings (Lithium battery), Approx. 10 years @23°C (@73.4°F)
Dimensions	Approx. 180W(7.09") × 100H(3.94") × 48D (1.89") mm (without PW9002) Approx. 180W(7.09") × 100H(3.94") × 68D (2.68") mm (with PW9002)
Mass	Approx. 550g (19.4 oz) (without PW9002), Approx. 830g (29.3 oz) (with PW9002)
Accessories	Voltage Cord L9438-53(1 set), AC Adapter Z1006 (1), USB cable(1), instruction manual (1), measurement guide (1), color spiral tubes (1 set): red, yellow, blue/two each, for color-coding clamp sensors, spiral tubes for grouping clamp sensor cords (5)

Accuracy guarantee period: One year 23°C ±3°C, 80%RH or less, (no condensation)

Measurement Specifications	
Connection	Single-phase 2-wire (1P2W, 1P2W × 2 circuits, 1P2W × 3 circuits) Single-phase 3-wire (1P3W, 1P3W+I, 1P3W1U, 1P3W1U+I) Three-phase 3-wire (3P3W2M, 3P3W2M+I, 3P3W3M) Three-phase 4-wire (3P4W), Current only: 1 to 3 channels
Simultaneous power/current measurement modes	1P3W+I: 1 power circuit and 1 current channel 3P3W2M+I: 1 power circuit and 1 current channel
Calculation selection	Power factor, reactive and apparent power: rms calculation/ fundamental wave calculation
Measurement accuracy (50/ 60Hz, power factor = 1)	Voltage: ±0.3% rdg. ±0.1% f.s. Current: ±0.3% rdg. ±0.1% f.s. + clamp sensor accuracy Active power: ±0.3% rdg. ±0.1% f.s. + clamp sensor accuracy Clamp-On Sensor 9661 accuracy: ±0.3% rdg. ±0.01% f.s. (Accuracy depends on clamp sensor. See page 6 for the accuracy of each model, and page 7 for combined accuracy of Model PW3360-20 and each clamp sensor.)
Display update rate	Approx. 0.5 sec (except when accessing SD card or internal memory, or during LAN/USB communication) However, approx. 1 s for power-related values
Measurement method	Digital sampling and zero cross synchronization calculation method Sampling: 10.24 kHz (2048 points) <b>Calculation processing</b> 50 Hz: Continuous, gapless measurement at 10 cycles 60 Hz: Continuous, gapless measurement at 12 cycles
A/D converter resolution	16bit

## Recording Specifications

Save destination	SD Card, internal memory (capacity: approx. 320 KB)
Save interval time	1/2/5/10/15/30 seconds, 1/2/5/10/15/20/30/60 minutes * Available storage time is displayed on PW3360-20's setting screen
Save items	<b>Measurement save:</b> Average only / all (average, maximum, minimum) <b>Harmonic data save:</b> Binary format (average, maximum and minimum) <b>Screen save:</b> ON/OFF Saves the displayed screen as a BMP at a fixed interval. (The minimum interval time for saving screen copies is 5 min. If the setting is less than 5 min., screen copies will be saved every 5 min.) <b>Waveform save:</b> Stores binary waveform data (with shortest interval 1 minute). When set to less than 1 minute, waveforms are saved once every minute
Recording start methods	Interval time, manual, or at specified time
Recording stop methods	Manual, or at specified time (up to one year)

## Harmonic Specifications (PW3360-21 only)

Standard	IEC61000-4-7:2002 compliant, but without interharmonics
Window width	10 cycles at 50 Hz, and 12 cycles at 60 Hz (with interpolation)
Points per window	Rectangular, 2048 points
Analysis orders	Up to the 40th order
THD calculation selection	THD-F/THD-R
Analysis items	Harmonic level: Voltage, current and power levels for each harmonic (U12 and I12 obtained by calculation of the third channel in 3P3W2M wiring are not displayed. Phase voltage is used for 3P3W3M wiring.) Harmonic content: Voltage, current and power contents for each harmonic Harmonic phase angle: Voltage, current and power phase angles for each harmonic Total harmonic distortion factor: Voltage and current (THD-F or THD-R)
Measurement accuracy	<b>Harmonic level</b> 1st to 15th orders : ±5% rdg. ±0.2% f.s. 16th to 20th orders : ±10% rdg. ±0.2% f.s. 21st to 40th orders : ±20% rdg. ±0.3% f.s. For voltage and current, add accuracy of clamp sensor. <b>Harmonic power phase angle</b> 1st to 3rd orders : ±3°+clamp sensor accuracy 4th to 40th orders : ±0.1°×k±3°+clamp sensor accuracy For each harmonic order at 6 V, harmonic current level is regulated at 1% f.s. Total harmonic distortion factor: Accuracy unspecified

## POWER LOGGER VIEWER SF1001 Specifications

Specifications in green available from version 2.00

General Specifications	
Supported models	PW3360-20, PW3360-21
Supported computer operating systems	Windows 8 (32/64bit) Windows 7 SP1 or later (32/64bit) Windows Vista SP2 or later (32bit) Windows XP SP3 or later (32bit)









## Functions Specifications


Trend graph display function	<b>Display items:</b> Voltage, current, active power, reactive power, apparent power, power factor, frequency, integrated active power, integrated reactive power, demand volume, demand value, voltage disequilibrium factor, <b>pulse, harmonics (level, content, phase angle, total value, THD)</b> <b>Stacked bar graph display:</b> Up to 16 types of data series can be displayed in an overlay graph <b>Cursor measurements:</b> Measurement values can be displayed by the cursor
Summary display function	Displayed items are the same as for the trend Graph Display <b>Daily, weekly and monthly report displays:</b> Accumulates and displays daily, weekly and monthly reports over specified period. <b>Load factor calculation display:</b> Calculates and displays load factor and demand factor results with daily, weekly and monthly reports <b>Time span aggregation:</b> Aggregates data into up to four specified time spans
Waveform display	Displays waveform data at specified date and time
Harmonic display	<b>List display:</b> Displays a list of harmonic data at specified date and time <b>Graph display:</b> Displays a bar graph of harmonic data at specified date and time <b>Cursor calculation:</b> Calculates measurement data at cursors in waveform and graph displays
Copy function	Captures any display image to the clipboard
Print function	Preview and print content shown on the trend graph, report, <b>harmonic graph</b> and settings displays. Comment entry (Text comments can be entered in any printout) Header/Footer settings: Sets the header and footer for each printout Printing support: Any color or monochrome printing supported by the operating system
Report printing	Print (static) contents over a specific time period Output contents: Standard or selected output items <b>Available output items:</b> Trend graph, summary, daily report, <b>harmonic list, harmonic graph, waveform</b> <b>Report creation method:</b> Standard print <b>Report output settings:</b> Save/load report output settings

**CLAMP SENSOR Specifications**



**CLAMP ON SENSOR**

		9694	9660	9661	9669	9695-02	9695-03
Appearance		 Cord length: 3 m (9.84ft)	 Cord length: 3 m (9.84ft)	 Cord length: 3 m (9.84ft)	 Cord length: 3 m (9.84ft)	 Insulated conductor	 Insulated conductor
Measurable conductor diameter		φ15mm (0.59")	φ15mm (0.59")	φ46mm (0.81")	φ55mm (2.17"), 80 (3.15")×20 (0.79")mm	φ15mm (0.59")	φ15mm (0.59")
Primary current rating		5A AC	100A AC	500A AC	1000A AC	50A AC	100A AC
Accuracy	Amplitude (45 to 66 Hz)	±0.3% rdg. ±0.02% f.s.	±0.3% rdg. ±0.02% f.s.	±0.3% rdg. ±0.01% f.s.	±1.0% rdg. ±0.01% f.s.	±0.3% rdg. ±0.02% f.s.	±0.3% rdg. ±0.02% f.s.
	Phase (45 Hz to 5 kHz)	Within ±2°	Within ±1°	Within ±0.5°	Within ±1°	Within ±2°	Within ±1°
Frequency characteristic 40Hz to 5kHz (deviation from accuracy)		Within ±1.0%			Within ±2.0%	Within ±1.0%	
Effect of external magnetic field (with a magnetic field of 400 A/ m AC)		Equivalent to 0.1 A or less			Equivalent to 1 A or less	Equivalent to 0.1 A or less	
Effect of conductor position		Within ±0.5%			Within ±1.5%	Within ±0.5%	
Maximum rated voltage to earth		CAT III 300Vrms	CAT III 300Vrms	CAT III 600Vrms	CAT III 600Vrms	CAT III 300Vrms	
Maximum input (45 to 66Hz)		50 A continuous	130 A continuous	550 A continuous	1000 A continuous	60 A continuous	130 A continuous
Dimensions		46W (1.81") × 135H (5.31") × 21D (0.83") mm	46W (1.81") × 135H (5.31") × 21D (0.83") mm	77W (3.03") × 151H (5.94") × 42D (1.65") mm	99.5W (3.92") × 188H (7.40") × 42D (1.65") mm	50.5W (2.28") × 58H (2.28") × 18.7D (0.74") mm	
Mass		230g (8.1 oz)	230g (8.1 oz)	380g (13.4 oz)	590g (20.8 oz)	50g (1.8 oz)	

**FLEXIBLE CLAMP ON SENSOR**

		CT9667
Appearance		 Cord length: 2 m (6.56ft) Sensor - circuit: 2 m (6.56ft) Circuit - connector: 1 m (3.28ft)
Measurable conductor diameter		φ254mm
Primary current rating		500A AC/5,000A AC
Accuracy (45 to 66Hz)	Amplitude	±2.0% rdg. ±0.3% f.s.
	Phase	Within ±1°
Frequency characteristic 10Hz to 20kHz (deviation from accuracy)		Within ±3 dB
Effect of external magnetic field (with a magnetic field of 400 A/ m AC)		1.5% / f.s. or less.
Effect of conductor position		Within ±3.0%
Maximum rated voltage to earth		CAT III 1000Vrms, CAT IV 600Vrms
Maximum input (45 to 66Hz)		10000 A continuous
Dimensions		Circuit box: 35W (1.38") × 120H (4.74") × 34D (1.34") mm
Mass		470g (16.6 oz.) (Sensor + Circuit Box, w/battery)
Power supply		LR06 alkaline battery × 2 (continuous operation max. 7 days) or AC ADAPTER 9445-02/9445-03 (optional)

**CLAMP ON LEAK SENSOR (Leakage Current Measurement Only)**

		9657-10	9675
Appearance		 Cord length: 3 m (9.84ft)	 Cord length: 3 m (9.84ft)
Measurable conductor diameter		φ40mm (1.57")	φ30mm (1.18")
Primary current rating		10A AC*	10A AC*
Accuracy	Amplitude (45 to 66 Hz)	±1.0% rdg. ±0.05% f.s.	±1.0% rdg. ±0.005% f.s.
	Phase angle (60 or 60 Hz)	Within ±3°	Within ±5°
Frequency characteristic 40Hz to 5kHz (deviation from accuracy)		Within ±5%	Within ±5%
Effect of external magnetic field (with a magnetic field of 400 A/ m AC)		7.5 mA max.	7.5 mA max.
Effect of conductor position		Within ±0.1%	Within ±0.1%
Maximum rated voltage to earth		CAT III 300Vrms	CAT III 300Vrms
Maximum input (45 to 66Hz)		30 A continuous	10 A continuous
Dimensions		74W (2.91") × 145H (5.71") × 42D (1.65") mm	60W (2.36") × 112.5H (4.43") × 23.6D (0.95") mm
Mass		380g (13.4 oz)	160g (5.6 oz)
Notes		Not used for power measurements	

\* Maximum AC measurement range with PW3360-20 is 5A.

**Available Recording Time**

PW3360-20 and PW3360-21 with Z4001 2-GB SD card, measuring 3P3W2M wiring

Saved Items: ALL data (Saves all data: average, maximum, and minimum values)  
Screen save: OFF    Waveform save: OFF

Interval time	Save Time		Interval time	Save Time	
	PW3360-20 PW3360-21 (Saving of harmonic data: OFF)	PW3360-21 (Saving of harmonic data: ON)		PW3360-20 PW3360-21 (Saving of harmonic data: OFF)	PW3360-21 (Saving of harmonic data: ON)
1 seconds	15.9 days	24.7 hours	30s	1 year	30.8 days
2 seconds	31.9 days	2.1 days	1 minutes	1 year	61.7 days
5 seconds	79.7 days	5.1 days	2 minutes	1 year	123 days
10 seconds	159 days	10.3 days	5 minutes	1 year	308 days
15 seconds	242 days	15.4 days	More than 10 minutes	1 year	1 year

The maximum recording time based on the settings can be confirmed right on the Settings screen.

In any case, the maximum file size for measurement data is about 200 MB. When this is exceeded, a new file is created and saving continues.

<NOTE>  
Regardless of the settings, the maximum save time of the PW3360-20, PW3360-21 is one year.

**Measurement Range Configurations**

Voltage / Connection		CLAMP ON SENSOR 9694 (CAT III 300V) *1				
		CLAMP ON SENSOR 9695-02 (CAT III 300V)				
Current	Connection	500.00 mA	1.0000 A	5.0000 A	10.000 A	50.000 A
600.00 V	1P2W	300.00 W	600.00 W	3.0000 kW	6.0000 kW	30.000 kW
	1P3W	600.00 W	1.2000 kW	6.0000 kW	12.000 kW	60.000 kW
	1P3W1U					
	3P3W2M					
	3P3W3M					
3P4W	900.00 W	1.8000 kW	9.0000 kW	18.000 kW	90.000 kW	

\*1. For the 9694 sensor, the range of guaranteed accuracy is from 500 mA to 5 A, and for the 9695-02, from 500 mA to 50 A.

Voltage / Connection		CLAMP ON SENSOR 9660, 9695-03 (CAT III 300V) *2				
		CLAMP ON SENSOR 9661				
Current	Connection	5.0000 A	10.000 A	50.000 A	100.00 A	500.00 A
600.00 V	1P2W	3.0000 kW	6.0000 kW	30.000 kW	60.000 kW	300.00 kW
	1P3W	6.0000 kW	12.000 kW	60.000 kW	120.00 kW	600.00 kW
	1P3W1U					
	3P3W2M					
	3P3W3M					
3P4W	9.0000 kW	18.000 kW	90.000 kW	180.00 kW	900.00 kW	

\*2. For the 9660 and 9695-03 sensors, the range of guaranteed accuracy is from 5 A to 100 A, and for the 9661, from 5 A to 500 A.

Voltage / Connection		CLAMP ON SENSOR 9669		
		100.00 A	200.00 A	1.0000 kA
600.00 V	1P2W	60.000 kW	120.00 kW	600.00 kW
	1P3W	120.00 kW	240.00 kW	1.2000 MW
	1P3W1U			
	3P3W2M			
	3P3W3M			
3P4W	180.00 kW	360.00 kW	1.8000 MW	

Voltage / Connection		FLEXIBLE CLAMP ON SENSOR CT9667	
		500.00 A	5.0000 kA
600.00 V	1P2W	300.00 kW	3.0000 MW
	1P3W	600.00 kW	6.0000 MW
	1P3W1U		
	3P3W2M		
	3P3W3M		
3P4W	900.00 kW	9.0000 MW	

<b>Leak current: CLAMP ON LEAK SENSOR 9657-10, 9675</b>	
Range	50.000 mA/100.00 mA/500.00 mA/1.0000 A/5.0000 A

**Measurement accuracy**

Voltage	±0.3% rdg. ±0.1% f.s.
Current	±0.3% rdg. ±0.1% f.s. + clamp sensor accuracy
Active power	±0.3% rdg. ±0.1% f.s. + clamp sensor accuracy (power factor = 1)

**Combined accuracy of PW3360-20 + clamp sensors**

Range	9694	9695-02
50.000 A	—	±0.6% rdg. ±0.12% f.s.
10.000 A	—	±0.6% rdg. ±0.2% f.s.
5.0000 A	±0.6% rdg. ±0.12% f.s.	±0.6% rdg. ±0.3% f.s.
1.0000 A	±0.6% rdg. ±0.2% f.s.	±0.6% rdg. ±1.1% f.s.
500.00 mA	±0.6% rdg. ±0.3% f.s.	±0.6% rdg. ±2.1% f.s.

Range	9660, 9695-03	9661
500.00 A	—	±0.6% rdg. ±0.11% f.s.
100.00 A	±0.6% rdg. ±0.12% f.s.	±0.6% rdg. ±0.15% f.s.
50.000 A	±0.6% rdg. ±0.14% f.s.	±0.6% rdg. ±0.2% f.s.
10.000 A	±0.6% rdg. ±0.3% f.s.	±0.6% rdg. ±0.6% f.s.
5.0000 A	±0.6% rdg. ±0.5% f.s.	±0.6% rdg. ±1.1% f.s.

Range	9669	
1.0000 kA	±1.3% rdg. ±0.11% f.s.	
200.00 A	±1.3% rdg. ±0.15% f.s.	
100.00 A	±1.3% rdg. ±0.2% f.s.	

Range	CT9667 5.000 kA range	CT9667 500 A range
5.0000 kA	±2.3% rdg. ±0.4% f.s.	—
500.00 A	—	±2.3% rdg. ±0.4% f.s.

**Total display range**

Voltage is displayed from 5 V to 1000 V, with less than 5 V displayed as 0 V.

Current is displayed from 0.4% to 130% of the selected range, with less than 0.4% displayed as 0 A

Power is displayed from 0 to 130% of full scale, with 0 W displayed when voltage or current is zero.

The range configurations for apparent power (S) and reactive power (Q) are the same, with units of [VA] and [var], respectively.

When VT and CT ratios are set, the range configuration is the product (VT ratio × CT ratio).

**Effective measurement range**


For voltage, 90 to 780 V, with max. 1400 V peak.

For current, 5% to 110% of the selected range with peak ±400% of range, but maximum range is ±200%.

For power, 5% to 110% of the selected range.

For frequency, 45 to 66 Hz.

**Current Display and Effective Measurement Ranges (typical)**

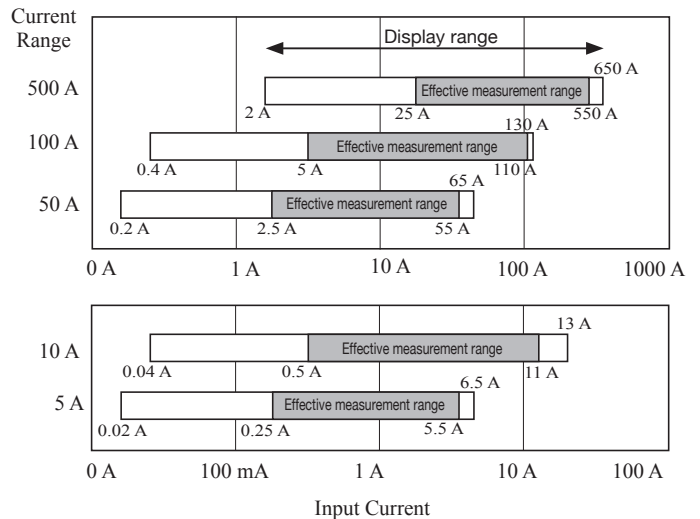

Conditions of guaranteed accuracy	After 30 minute warm-up, with 50/60 Hz sine wave input
Temperature and humidity for guaranteed accuracy	23°C ±5°C (73 ±9°F), 80%RH or less (applies to all specifications unless otherwise noted)
Display area of guaranteed accuracy	Effective measurement range
Period of guaranteed accuracy	1 year
Real-time clock accuracy	Within ±0.3 sec/day (with power on, within specified operating temperature and humidity ranges)
Temperature characteristic	Within ±0.1% f.s./°C (except 23 ±5°C)
Effect of common mode voltage	Within ±0.2% f.s. (600 V AC, 50/60 Hz, between voltage input terminal and case)
Effect of external magnetic field	Within ±1.5% f.s. (in a magnetic field of 400 A/m rms AC, 50/60 Hz)
Effect of phase	Phase accuracy ±0.3° equivalent (with 50/60 Hz f.s. input)
Apparent power	±1 dgt. for the calculation obtained from each measurement value
Reactive power	Fundamental waveform calculations ±0.3% rdg. ±0.1% f.s. + clamp-on sensor accuracy (w/power factor = 1) Rms calculations From each measurement applied to calculation ±1 dgt.
Energy	Active and reactive power measurement accuracies ±1 dgt.
Power factor	From each measurement applied to calculation ±1 dgt.
Frequency	±0.5% rdg. (with 90 to 780 V sine wave input)
Demand value	Active and reactive power measurement accuracies ±1 dgt.
Demand quantity	Active and reactive power measurement accuracies ±1 dgt.
Pulse input	±1 dgt. for the calculation obtained from each measurement value
Frequency characteristic	At 50/60 Hz fundamental waveform frequency, up to 1 kHz, ±3% rdg. ±0.2% f.s. up to 3kHz, ±10% rdg. ±0.2% f.s. For current and active power, add clamp-on sensor accuracy. Note: only for 3P3W3M wiring, add ±0.5% rdg.

# CLAMP ON POWER LOGGER PW3360-20

## Harmonic Measurement Model CLAMP ON POWER LOGGER PW3360-21



### Accessories

**VOLTAGE CORD L9438-53** (1 set), **AC ADAPTER Z1006** (1), USB cable (1), instruction manual (1), measurement guide (1), color spiral tubes (1 set): red, yellow, blue/two each, for color-coding clamp sensors, spiral tubes for grouping clamp sensor cords (5)

Clamp-On Power Logger PW3360-20, PW3360-21 by itself does not support current and power measurements. Current and power measurements require clamp-on sensors, sold separately. Also, use only HIOKI-issued SD cards guaranteed to work for saving measurement data, (options, sold separately).

### AC ADAPTER Z1006



### VOLTAGE CORD L9438-53



cord length: 3m (9.84 ft)

1 cord each of black, red yellow, and blue, and five spiral tubes for bundling cords

### Options

#### CLAMP ON SENSOR (for load current measurement)

- CLAMP ON SENSOR 9694 (AC5A)
  - CLAMP ON SENSOR 9660 (AC100A)
  - CLAMP ON SENSOR 9661 (AC500A)
  - CLAMP ON SENSOR 9669 (AC1000A)
  - FLEXIBLE CLAMP ON SENSOR CT9667 (AC5000A)
  - CLAMP ON SENSOR 9695-02 (AC50A)
  - CLAMP ON SENSOR 9695-03 (AC100A)
  - CONNECTION CORD 9219 (for connection to 9695-02, 9695-03)
- When purchasing the 9695-02 and 9695-03, we recommend also purchasing the separately sold 9219 Connection Cord.

#### CLAMP ON LEAK SENSOR (for leakage current measurement)

- CLAMP ON LEAK SENSOR 9657-10
- CLAMP ON LEAK SENSOR 9675

### CLAMP ON ADAPTER

**9290-10** MAX. 1500A AC (continuous: 1000A)



Primary side  
1000A

CAT III 600V  
Cord length: 3m (9.84 ft)

Secondary side  
100A

#### Measurable conductor diameter

- φ55 mm (2.17in)
- Bus bar: ■ 80 mm (3.46in) × 20 mm (0.79 in)
- CT ratio: 10:1

### SD MEMORY CARD 2GB

**Z4001**




Stores up to one year's data when acquired at one minute intervals. Performance cannot be guaranteed on storage media other than Hioki-specified SD card options.

### VOLTAGE LINE POWER ADAPTER

**PW9003**

(supplies power from measurement lines)


Rated voltage: 240 V AC  
Operating temperature and humidity range: -10 to 50°C, 80% RH or less

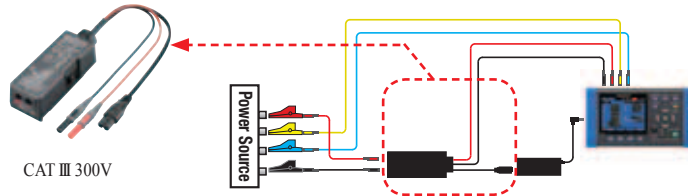

### BATTERY SET

Battery Case and Battery Pack Set

**PW9002**



**BATTERY PACK 9459**

For purchase as replacement battery pack

### CARRYING CASE

**C1005**



Dimension:  
Approx. 390W (15.4") × 275H (10.8") × 110D (4.3") mm

### MAGNET ADAPTER

**9804-01 Red**



**9804-02 Black**


φ11mm (0.43 in)  
(generally compatible with M6 pan screws)

Magnetic tip for use with the standard  
VOLTAGE CORD L9438-53

Red and black adapters sold separately.  
Purchase the quantity and color appropriate for your application.  
(Example: 3P3W-3 adapters, 3P4W-4 adapters)

### POWER LOGGER VIEWER

**SF1001**



### LAN CABLE

**9642**



Note: Company names and Product names appearing in this catalog are trademarks or registered trademarks of various companies.

# HIOKI

HIOKI E. E. CORPORATION

#### HEADQUARTERS:

81 Koizumi, Ueda, Nagano, 386-1192, Japan  
TEL +81-268-28-0562 FAX +81-268-28-0568  
http://www.hioki.com / E-mail: os-com@hioki.co.jp

#### HIOKI USA CORPORATION:

TEL +1-609-409-9109 FAX +1-609-409-9108  
http://www.hiokiusa.com / E-mail: hioki@hiokiusa.com

#### HIOKI (Shanghai) SALES & TRADING CO., LTD.:

TEL +86-21-63910090 FAX +86-21-63910360  
http://www.hioki.cn / E-mail: info@hioki.com.cn

DISTRIBUTED BY

#### HIOKI INDIA PRIVATE LIMITED:

TEL +91-124-6590210 FAX +91-124-6460113  
E-mail: hioki@hioki.in

#### HIOKI SINGAPORE PTE. LTD.:

TEL +65-6634-7677 FAX +65-6634-7477  
E-mail: info-sg@hioki.com.sg

#### HIOKI KOREA CO., LTD.:

TEL +82-42-936-1281 FAX +82-42-936-1284  
E-mail: info-kr@hioki.co.jp