


# PX-201 Controlled Temperature Soldering Iron


Wide-range iron with temperature adjuster.

## TEMPERATURE-CONTROLLED SOLDERING IRON PX-201

RoHS

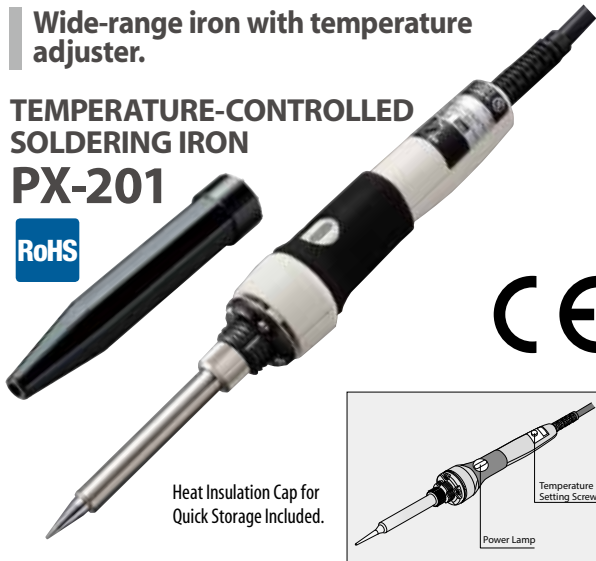

Heat Insulation Cap for Quick Storage Included.



**TEMPERATURE ADJUSTABLE**  
250-450°C

**ACCURATE TEMPERATURE CONTROL**  
Ceramic heater with internal sensor

**ERGONOMIC GRIP**  
Prevents fatigue

**HEAT-RESISTANT CAP**  
For quick storage after use


### SPECIFICATIONS

Model	PX-201
Voltage	110-120V, 220-240V AC 50/60Hz
Power Consumption	70W
Temperature Setting Range	250-450°C
Ripple temperature	±5°C (unloaded)
Insulation Resistance	Over 100MΩ (500V DC)
Heater	Ceramic Heater
Power Cord Length	1.5m
Length	210mm
Weight	90g
Accessories	Soldering Iron Tip (PX-2RT-SB)

\*The length does not include the cord bushing. The weight does not include the cord.

### REPLACEMENT PARTS / OPTIONS

Heater	Heater Barrel
PX-20H	TQ-77HP (S)
Spacer	Collar
TQ-77SS	TQ-77NUT
CAP	Recommended Stand
TQ-CAP	ST-27



### REPLACEMENT TIPS

<b>PX-2RT-SB</b>	<b>PX-2RT-B</b>	<b>PX-2RT-BC</b>
<b>PX-2RT-2BC</b>	<b>PX-2RT-3BC</b>	<b>PX-2RT-2C</b>
<b>PX-2RT-3C</b>	<b>PX-2RT-4C</b>	<b>PX-2RT-5C</b>
<b>PX-2RT-1.6D</b>	<b>PX-2RT-2.4D</b>	<b>PX-2RT-3.2D</b>
<b>PX-2RT-4D</b>	<b>PX-2RT-5D</b>	<b>PX-2RT-5K</b>
<b>PX-2RT-8S</b>	<b>PX-2RT-6E</b>	<b>Overall View</b>
		<b>PX-2RT-B</b>